


GMP Tornado Configuration for Cable Blowing

Locator	Description	Qty needed
(A)	Duct Clamp	1 (2 halves)
(B)	Duct Seal	1 (2 halves)
(C)	Cable Collet	1 or 2 (2 halves) <i>see note 3</i>
(D)	Cable Guide	0 or 1 (2 halves) <i>see note 3</i>
(E)	Cable Seals	1 (pkg of 10)
(F)	Cable Seal Plug	1 unit

In order to configure your Tornado to work with your specific cable requirements you must select items below that match your duct and cable size.

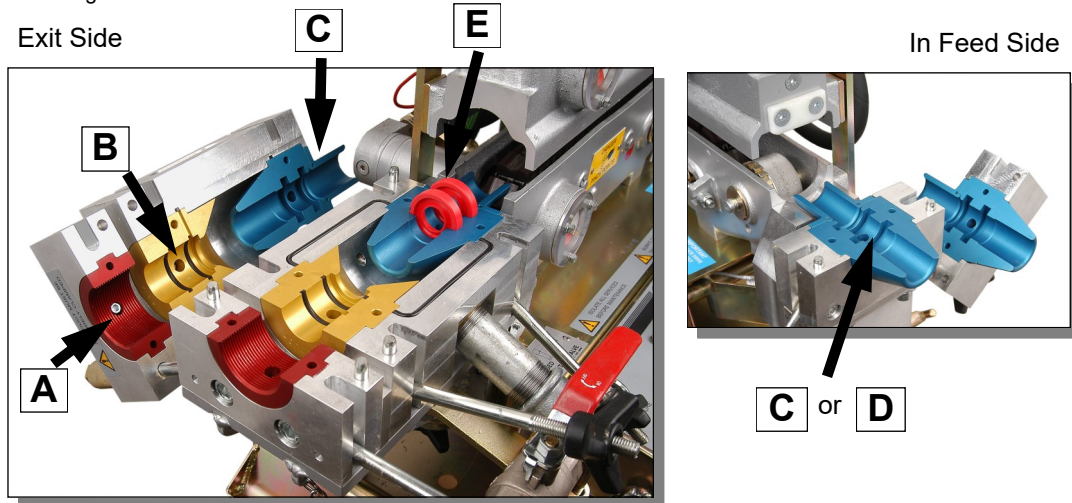

How to specify the collets and seals to match your cable and duct size .

Note: Cables 10.5mm and larger utilize the standard belt. Cables below 10.5mm require a dedicated belt.

- Select one (1) Duct Clamp (locator A) that represents the **size** of the duct that you're using.
- Select one (1) Duct Seal (locator B) that represents the **size** of the duct that you're using.
- Select the Cable Collet (locator C). Always use a Cable Collet on the cable exit side.
If you use either 6-9 mm or 9-12 mm cable, use a Cable Guide (locator D) on the cable in feed side, for anything larger than these sizes, use a Cable Collet on the in feed side.
- Select the Cable Seals (locator E) that match your cable size.
- Select one (1) Cable Seal Plug (locator F) that match your cable size.

(Loc A) DUCT CLAMPS (O.D. Controlled)

- 89033 DUCT CLAMP 3/4"
- 89021 DUCT CLAMP 1"
- 89041 DUCT CLAMP 1.25"
- 89061 DUCT CLAMP 1.50"
- 89071 DUCT CLAMP 2"



(Loc B) DUCT SEALS (O.D. Controlled)

- 89034 DUCT SEAL 3/4"
- 89022 DUCT SEAL 1"
- 89042 DUCT SEAL 1.25"
- 89062 DUCT SEAL 1.50"
- 89072 DUCT SEAL 2"



Other duct sizes available. Contact factory for details.

(Loc C & D) CABLE COLLETS (6-32 MM) & GUIDES (6-12 MM)

- | | | |
|-------|---|--|
| 89081 | 6-9 MM (.23 - .35") (1 Collet REQ) (exit side) | Collet & guide used together for this size cable |
| 89082 | 6-9 MM (.23 - .35") (1 Guide REQ) (in feed side) | |
| 89083 | 9-12 MM (.35 - .47") (1 Collet REQ) (exit side) | Collet & guide used together for this size cable |
| 89084 | 9-12 MM (.35 - .47") (1 Guide REQ) (in feed side) | |
| 89091 | 12-16 MM (.47 - .63") (2 Collets REQ) | Same collet used on both in feed and exit side |
| 89092 | 16-20 MM (.63 - .79") (2 Collets REQ) | |
| 89101 | 20-24 MM (.79 - .95") (2 Collets REQ) | |
| 89102 | 24-28 MM (.95 - 1.10") (2 Collets REQ) | |
| 89107 | 28-32 MM (1.10 - 1.26") (2 Collets REQ) | |



(Loc E) CABLE SEALS (6-32 MM)

- 89085 6-7.5 MM (.23 - .29") 10/PK
- 89086 7.5-9 MM (.29 - .35") 10/PK
- 89087 9-10.5 MM (.35 - .41") 10/PK
- 89088 10.5-12 MM (.41 - .47") 10/PK
- 89093 12-14 MM (.47 - .55") 10/PK
- 89094 14-16 MM (.55 - .63") 10/PK
- 89095 16-18 MM (.63 - .71") 10/PK
- 89096 18-20 MM (.71 - .79") 10/PK
- 89103 20-22 MM (.79 - .87") 10/PK
- 89104 22-24 MM (.87 - .95") 10/PK
- 89105 24-26 MM (.95 - 1.02") 10/PK
- 89106 26-28 MM (1.02 - 1.10") 10/PK
- 89110 28-30 MM (1.10 - 1.18") 10/PK
- 89111 30-32 MM (1.18 - 1.26") 10/PK
- 89112 32-34 MM (1.26 - 1.34") 10/PK



ID COLOR CODES

- GREEN 1 LINE
- GREEN 2 LINES
- PURPLE 1 LINE
- PURPLE 2 LINES
- SILVER 1 LINE
- SILVER 2 LINES
- GOLD 1 LINE
- GOLD 2 LINES
- BLUE 1 LINE
- BLUE 2 LINES
- RED 1 LINE
- RED 2 LINES
- BLACK 1 LINE
- BLACK 2 LINES
- BLACK 3 LINES

(Loc F) CABLE SEAL PLUGS (6-32 MM)

- 89125 6-7.5 MM (.23 - .29")
- 89126 7.5-9 MM (.29 - .35")
- 89127 9-10.5 MM (.35 - .41")
- 89128 10.5-12 MM (.41 - .47")
- 89129 12-14 MM (.47 - .55")
- 89130 14-16 MM (.55 - .63")
- 89131 16-18 MM (.63 - .71")
- 89132 18-20 MM (.71 - .79")
- 89133 20-22 MM (.79 - .87")
- 89134 22-24 MM (.87 - .94")
- 89135 24-26 MM (.94 - 1.02")
- 89136 26-28 MM (1.02 - 1.10")
- 89162 28-30 MM (1.10 - 1.18")
- 89164 30-32 MM (1.18 - 1.26")
- 89122 32-34 MM (1.26 - 1.34")

