Reel Lifter

			
Insert the Reel Lifter into reel in rolling position. Slowly Lift from flipping eye.	Drop the Reel Lifter into the arbor hole.	Apply lift to the top ring. Toggle engages under the top flange.	Now you're ready to lift, stack or unwind

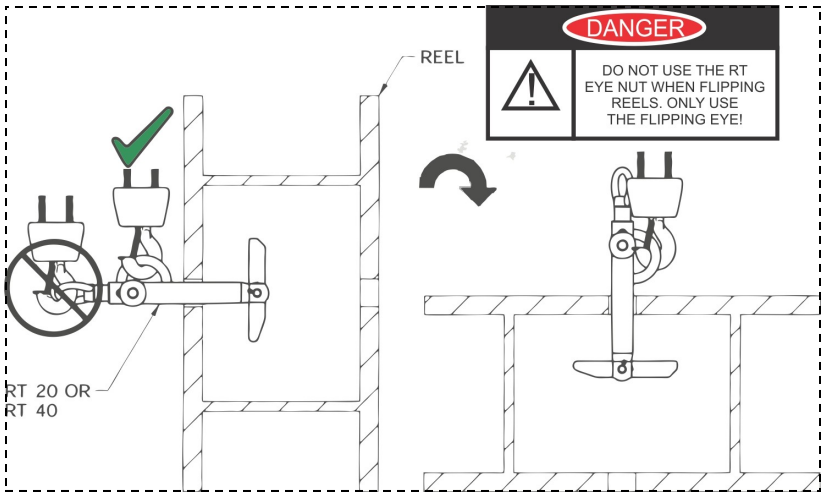

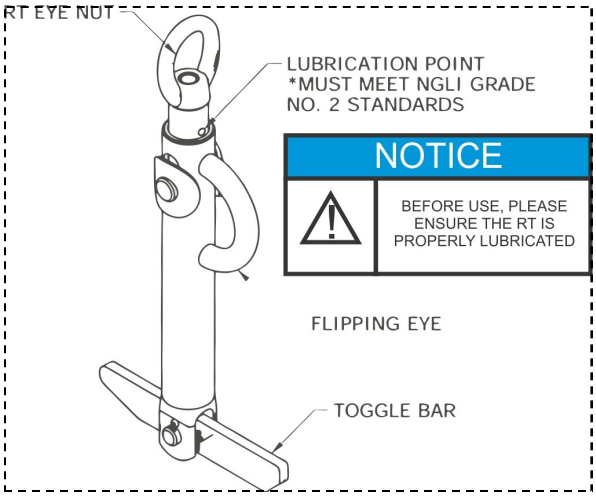

In order to maintain ASME B30.20, the RT's must be inspected in accordance with Section B30.20-1.3.

Model	Arbor Size		Weight Capacity
	Minimum	Maximum	
70220 (RT– 20)	2" (51 mm)	4" (102 mm)	3000 lbs (1361 kg)
70240 (RT– 40)	3" (76 mm)	6" (152 mm)	4500 lbs. (2041 kg)

GMP • 3111 Old Lincoln Hwy • Trevose, PA 19053 • USA
TEL: +1-215-357-5500 • www.gmptools.com • EMAIL: info@gmptools.com